

```
[xcolor=dvipsnames]beamer
marvosym tikz,xcolor,soul media9 []beamerthemeMadrid
[shadow]beamerinnerthemerounded []beamercolorthemerose
Theorem [theorem]Proposition [theorem]Corollary
enumerate graphicx amsmath,amssymb hyperref
[english]babel
[T1]fontenc ifthen latexsym,times,graphics,amssymb,fancybox,fancyhdr,bm
natbib
color
Sweave
```

Lecture 3: Exploratory Data Analysis and Base R Graphics

Lydia Hsu
Columbia University

September 28, 2018

- **Filtering.** Accessing elements of a structure based on some criteria.
`v[v>5], m[m[,1]!=0,].`
- **Lists.** Elements can all be different types. Access like `l[[3]], l$name`. Create with `list()`.
- **NA and NULL values.** NA is missing data and NULL doesn't exist.
- **Factors and Tables.** Factors is how R classifies categorical variables.
- **Dataframes.** Used for data that is organized with rows indicating cases and columns indicating variables.
- **Importing and Exporting Data in R.** Use `read.csv()` and `read.table()` depending on dataset type. The working directory.
- **Control Statements.** We studied iteration, `for` loops and `while` loops, and `if, else` statements.
- **Vectorized Operations.** To be used instead of iterations.

Exploratory Data Analysis and R Graphics

Diamonds Dataset

Info on ~ 54000 diamonds from www.diamondse.info.

Variables

- **Carat** – Weight of the diamond (0.2 - 5.01).
- **Color** – Diamond color from J (worst) to D (best).
- **Clarity** – A measurement of how clear the diamond is (I1 (worst), SI1, SI2, VS1, VS2, VVS1, VVS2, IF (best)).
- **Cut** – Quality of the cut (Fair, Good, Very Good, Premium, Ideal).
- **Price** – Price in US dollars.

Diamonds Dataset

Think by yourself for a few minutes: what are some interesting questions we could answer using this dataset?

Diamonds Dataset

Think by yourself for a few minutes: what are some interesting questions we could answer using this dataset?

Some ideas:

- What does the distribution of diamond prices look like? Symmetric? Skewed?
- How does a diamond's price relate to its weight?
- Does the relationship between the price and the weight change depending on the quality of the diamond's cut?

Exploratory Data Analysis ¹

Exploratory Data Analysis, or EDA for short, is exploring data in a systematic way.

It's an iterative process:

1. Generate questions about your data.
2. Search for answers by visualizing, transforming, and modelling your data.
3. Use what you learn to refine your questions and or generate new questions.

¹EDA slides developed from G. Grolemund and H. Wickham.

Exploratory Data Analysis

EDA is a way for you to learn about and better understand your data.

Asking Questions

1. What type of **variation** occurs **within** my variables?
2. What type of **covariation** occurs **between** my variables?

We focus on each of these questions separately.

Variation

Variation is the tendency of measured values of a variable to change measurement-to-measurement.

- Visualizing the distribution of a variable is the best way to understand the patterns of a variable's variance.
- Visualize the distribution of a **categorical** variable using a bargraph.
- Visualize the distribution of a **continuous** variable using a histogram (or boxplot).

Bargraphs in R

Produce a bargraph using `barplot(heights, labels)` where `heights` is a vector of values for the heights of each bar and `labels` is an optional vector of labels for each bar.

- Can use `table()` as input for the bar heights.
- The order that `table()` uses is the order of the factor levels of its input.

Bargraphs in R

Plotting a Bargraph of Diamond Cut

```
> table(diamonds$cut)
```

	Fair	Good	Ideal	Premium	Very Good
	1610	4906	21551	13791	12082


```
> names(table(diamonds$cut))
```

```
[1] "Fair"        "Good"        "Ideal"        "Premium"  
[5] "Very Good"
```

Bargraphs in R

Plotting a Bargraph of Diamond Cut


```
> barplot(height = table(diamonds$cut),  
+           names.arg = names(table(diamonds$cut)))
```

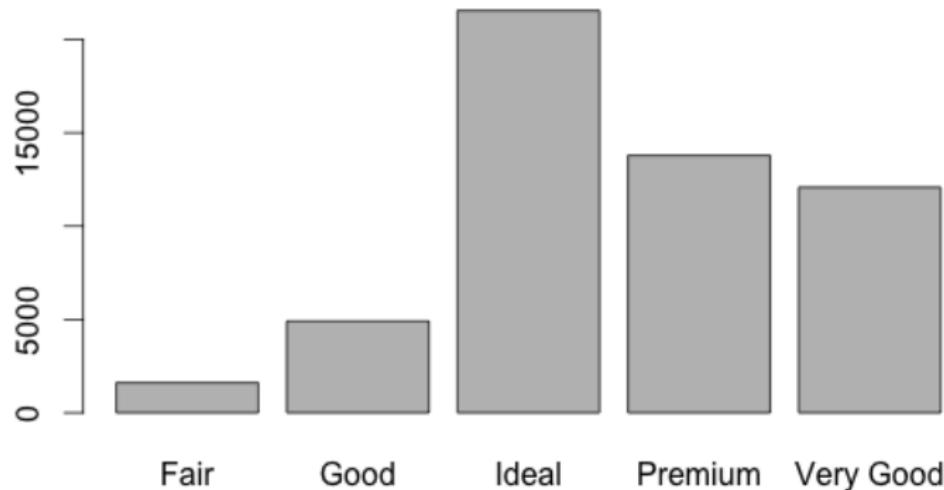

Bargraphs in R

Plotting a Bargraph of Diamond Cut

```
> barplot(height = table(diamonds$cut),  
+           names.arg = names(table(diamonds$cut)))
```

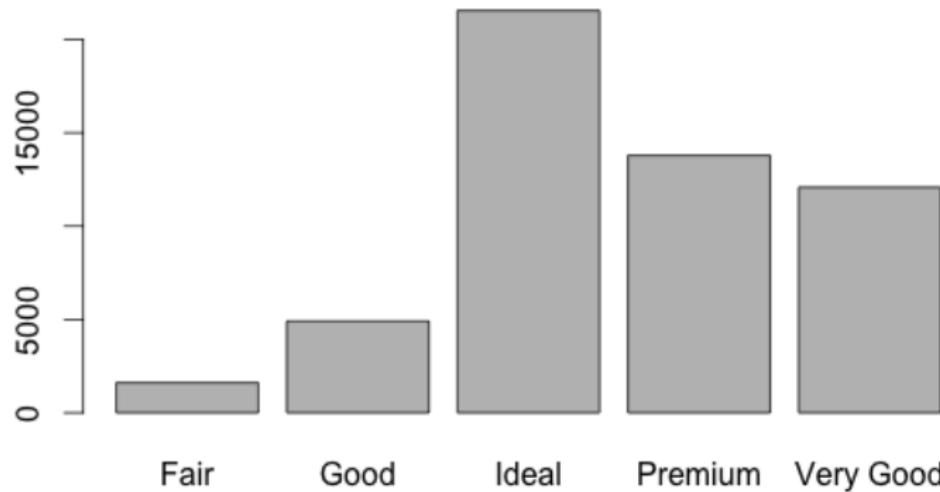

Oops! The order should be Fair, Good, Very Good, Premium, Ideal.

Bargraphs in R

Plotting a Bargraph of Diamond Cut

```
> levels(diamonds$cut)
```

```
[1] "Fair"      "Good"      "Ideal"      "Premium"  
[5] "Very Good"
```


```
> diamonds$cut <- factor(diamonds$cut, level = c("Fair",  
+                               "Good", "Very Good", "Premium",  
+                               "Ideal"))  
> levels(diamonds$cut)
```

```
[1] "Fair"      "Good"      "Very Good"  "Premium"  
[5] "Ideal"
```

Bargraphs in R

Plotting a Bargraph of Diamond Cut

```
> barplot(height = table(diamonds$cut),  
+           names.arg = names(table(diamonds$cut)))
```

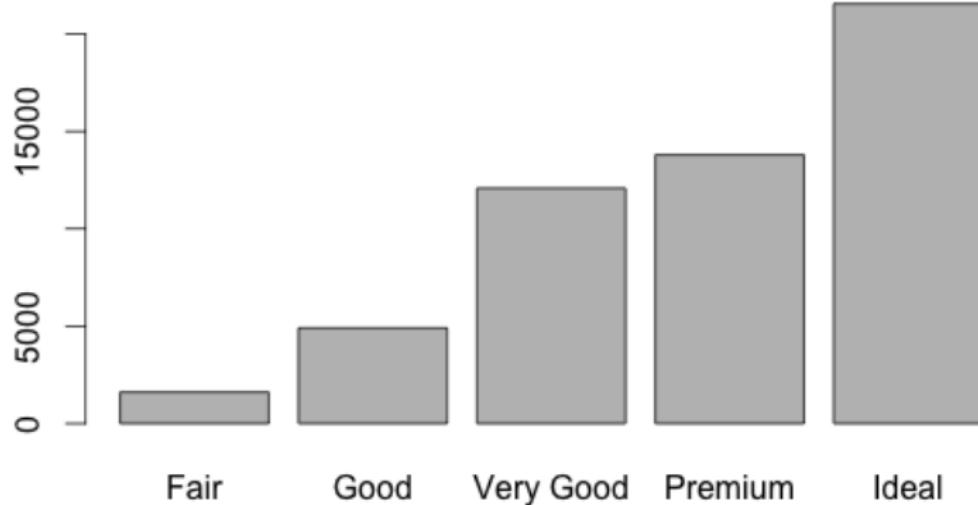

Histograms in R


Produce a histogram using `hist(values)` where `values` is a vector of values.

- A histogram divides the x-axis into equally-spaced bins with the height of the bars used to indicate the number of observations falling within the bin.
- Change the width of the histogram's bins using `break =` argument. This specifies the number of bins.
- Make sure to explore different binwidths as different widths will display different patterns in the data.

Histograms in R

Plotting a Bargraph of Diamond Cut

```
> hist(diamonds$carat, main = "Histogram of Carats",  
+       xlab = "Carats")
```

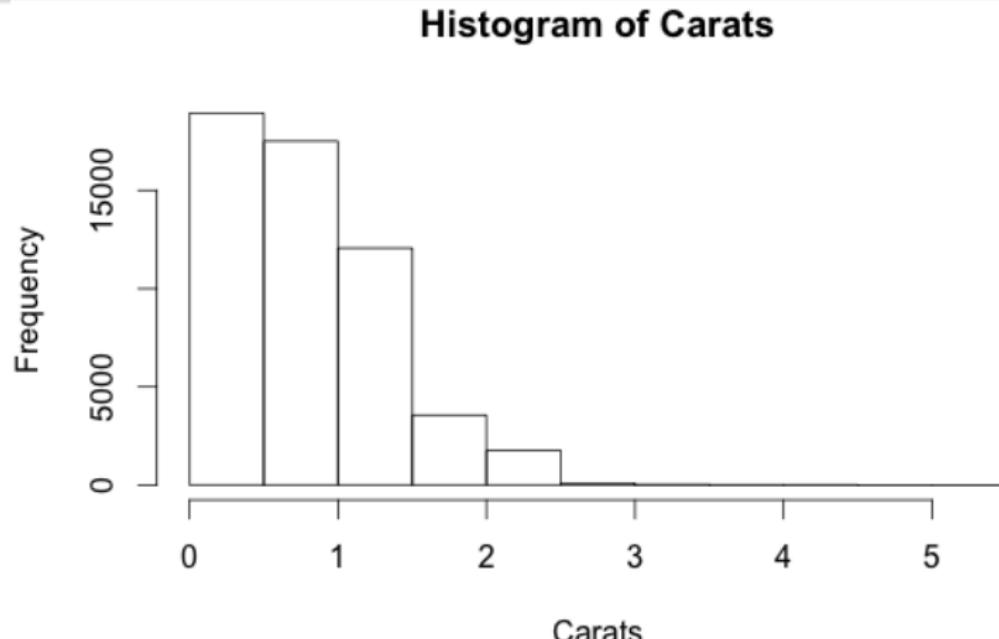


Histograms in R

Plotting a Bargraph of Diamond Cut

```
> hist(diamonds$carat[diamonds$carat < 3], breaks = 100,  
+       main = "Histogram of Carats", xlab = "Carats")
```

Histogram of Carats

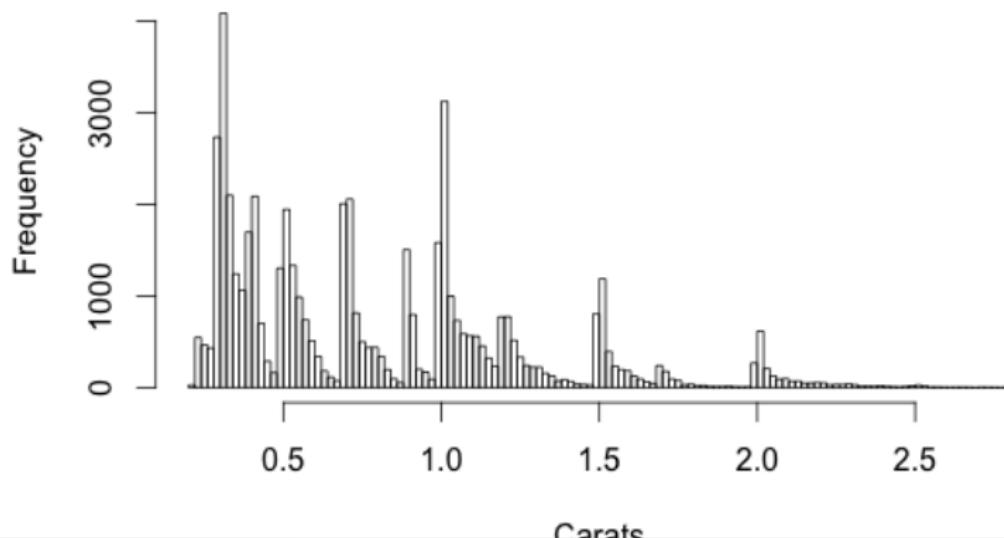


Visualizing Variation

What should we be looking for in these plots?

- Use the plots to create new questions.
 - What do you want to learn more about?
 - Are there any interesting patterns I want to explore.
- Use the plots to better understand the data.
 - Do these plots match my expectations? Why or why not?
 - Do the data cluster in interesting ways?
 - What are the typical values? Outliers? Why?
 - How could this be misleading?

Visualizing Variation

Histogram of Carats

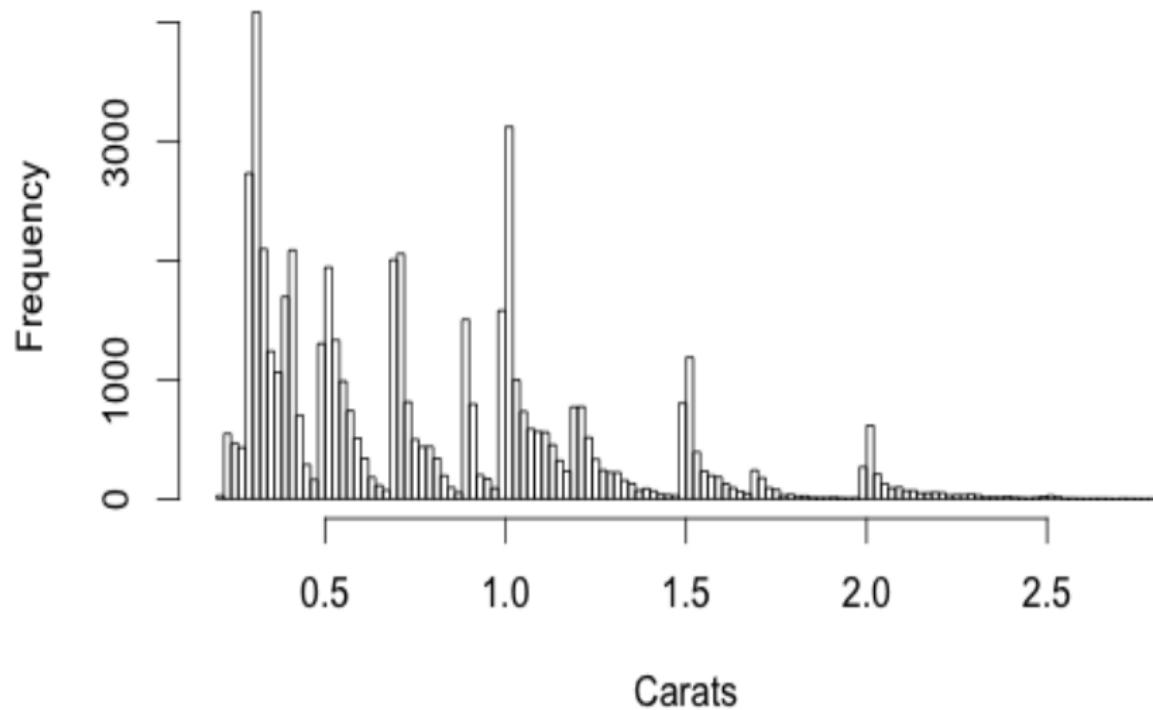

Covariation

Covariation is the tendency for the values of two or more variables to vary together in a related way.

- Visualizing the relationship between variables is the best way to spot covariation.
- Visualize the distribution of a **categorical** variable and a **continuous** variable using a boxplot.
- Visualize the distribution of two **continuous** variables using a scatterplot.

Boxplots in R


Produce a boxplot (box-and-whisker plot) using `boxplot(values ~ group)` where `values` is a vector of data to be split according to `group`.

- The box stretches from the 25th percentile of the distribution to the 75th percentile (the IQR).
- The line in the middle is the median.
- The 'whiskers' extend to 1.5 times the IQR on either end.

Boxplots in R

Plotting a Boxplot of Diamond Price by Cut

```
> boxplot(price ~ cut, data = diamonds, ylab = "Price",  
+           xlab = "Cut")
```

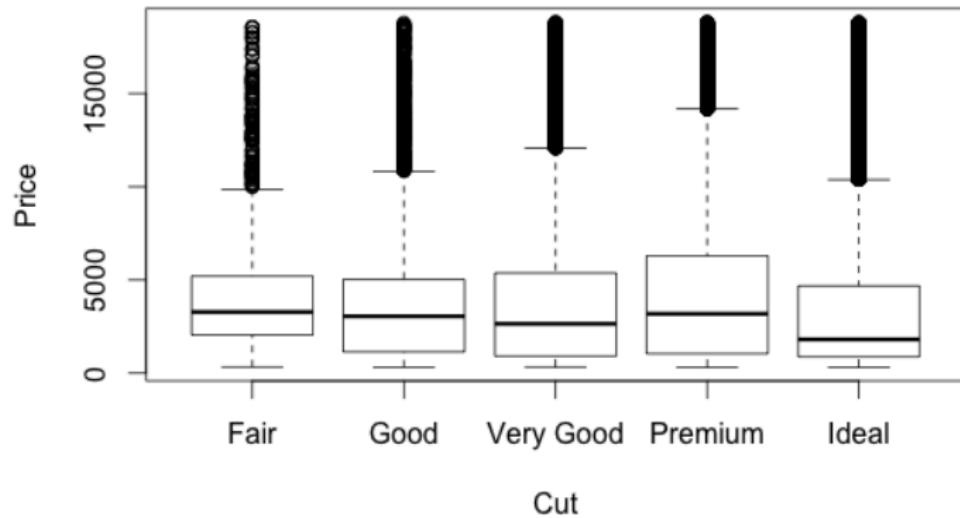


Scatterplot in R

Produce a scatterplot using `plot(x, y)` where `x` is a vector of x-values and `y` a vector of y-values.

Scatterplot in R

Plotting a Scatterplot of Diamond Price vs. Carat

```
> plot(diamonds$carat, diamonds$price, xlab = "Carats",  
+       ylab = "Price ($)")
```

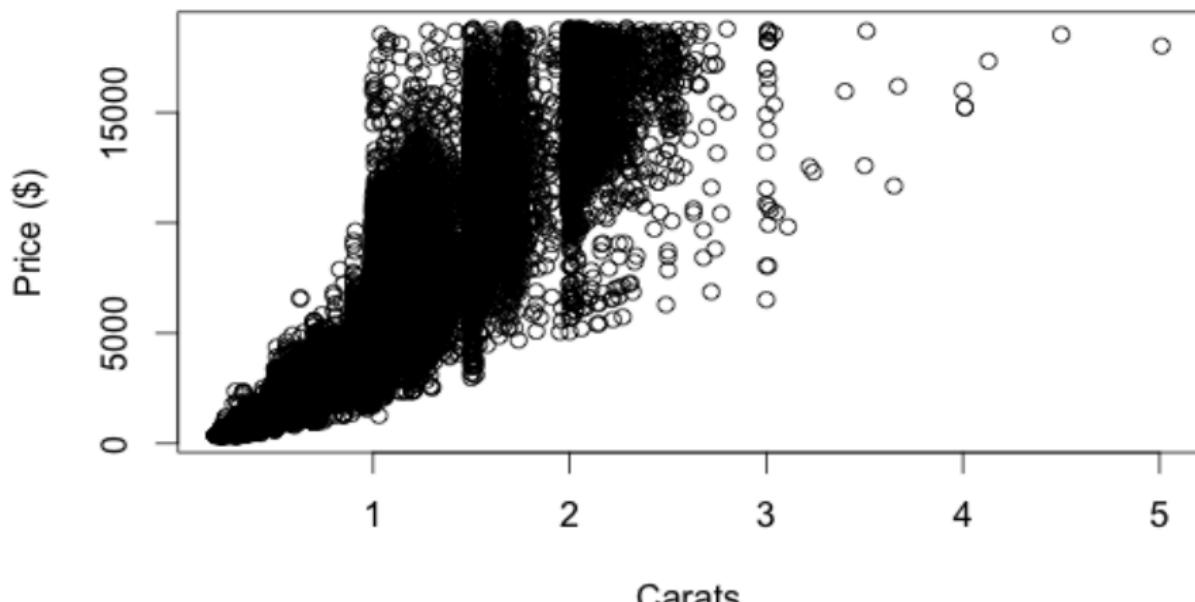

Visualizing Covariation


If a relationship exists between two variables it will show up as patterns in your plots.

Ask yourself the following questions.

- Is that pattern random (due to chance)?
- What relationship does the pattern imply?
- Is the relationship strong, weak, linear, non-linear, etc.?
- What other variables might affect the relationship?
- Does the relationship change if you look at individual subgroups of the data?

Boxplots in R

```
> boxplot(carat ~ cut, data = diamonds, ylab = "Carats",  
+           xlab = "Cut")
```

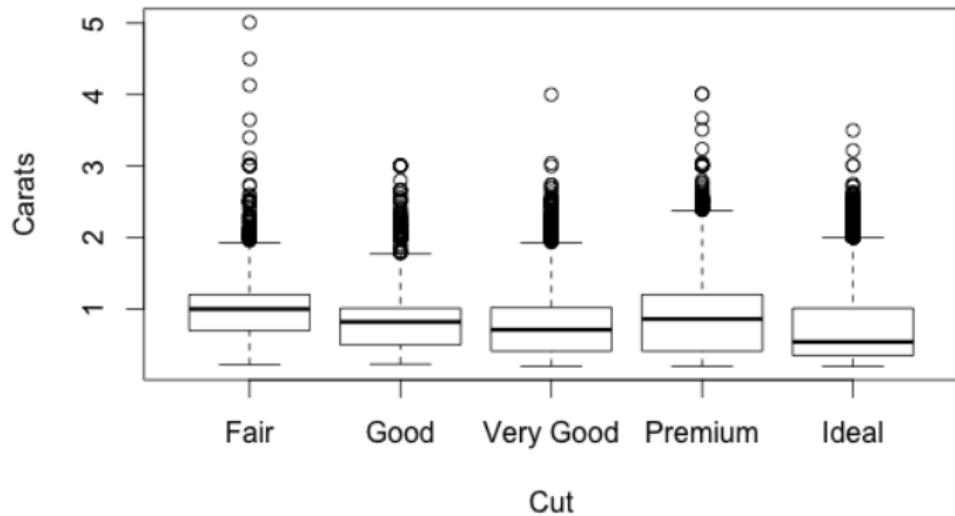

Often Visualization Isn't Enough

- Difficult to understand the relationship between price and cut because price and carat and carat and cut are also related.
- Here we would need to use a model (last class, linear models) to consider all these relationships simultaneously.

Basics of Plotting

The `plot()` function.

- The foundation of many of R's graphics functions.
- Often one builds up the graph in stages with `plot()` as a base.
- Each call to `plot()` begins a new graph window.
- Takes arguments, called *graphical parameters*, to change various aspects of the plot. (`?par`)

Building a Visualization: An Example


Back to the diamonds.

First, we create a smaller dataset from diamonds by randomly selecting 1000 rows.

```
> rows      <- dim(diamonds)[1]
> small_diam <- diamonds[sample(1:rows, 1000), ]
```

Building a Visualization: An Example

```
> plot(log(small_diam$carat), log(small_diam$price),  
+       col = small_diam$cut)  
> legend("bottomright", legend = levels(small_diam$cut),  
+       fill = 1:length(levels(small_diam$cut)), cex = .5)
```

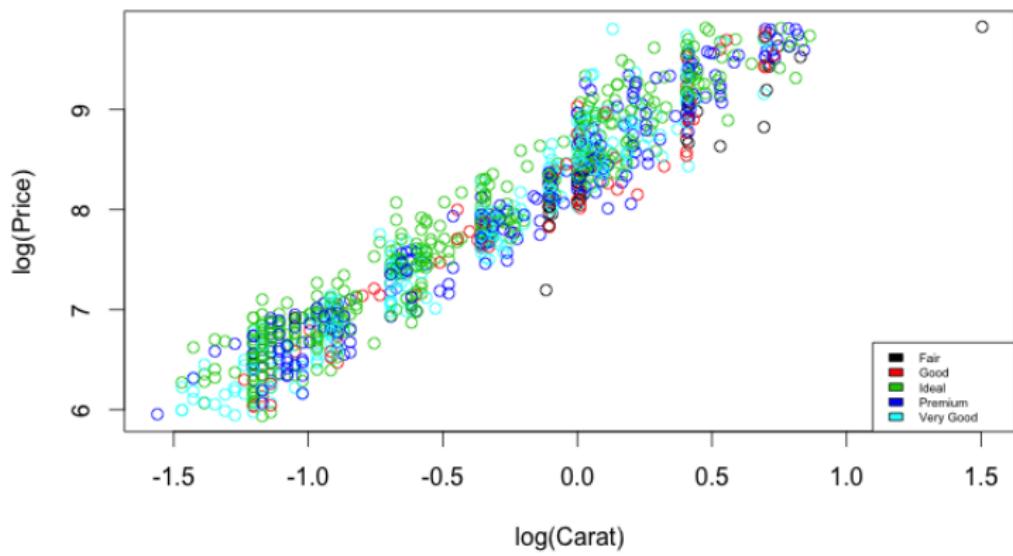


Building a Visualization: An Example

Adding Lines to a Scatterplot

- Add a straight line with `abline(int, slope)`.
 - `int` is the intercept of the line.
 - `slope` is the slope of the line.
- `lines()` can also be used.
 - Most simply, pass `lines()` `x` and `y` vectors and it connects the points.

Building a Visualization: An Example

```
> abline(8, 0, col = "orange", lty = 2)
> lm1 <- lm(log(small_diam$price) ~ log(small_diam$carat))
> abline(lm1)
```

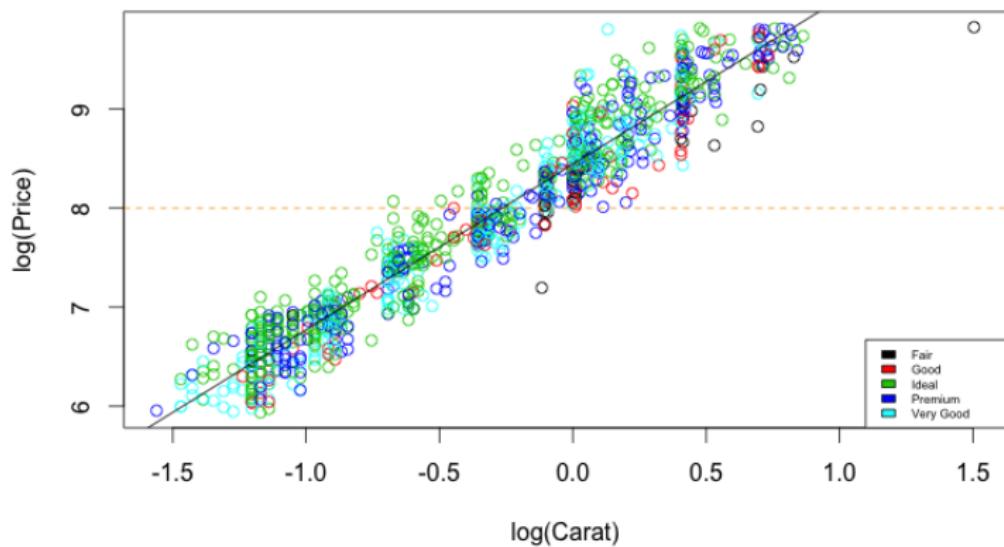

Building a Visualization: An Example

Let's instead plot a regression line for each cut separately.

How do we do this?


- Think about this task for a moment.

Building a Visualization: An Example

Let's instead plot a regression line for each cut separately.

```
> cuts      <- levels(small_diam$cut)
> col_counter <- 1
> for (i in cuts) {
+   this_cut      <- small_diam$cut == i
+   this_data     <- small_diam[this_cut, ]
+   this_lm       <- lm(log(this_data$price)
+                         ~ log(this_data$carat))
+   abline(this_lm, col = col_counter)
+   col_counter <- col_counter + 1
+ }
```

Building a Visualization: An Example

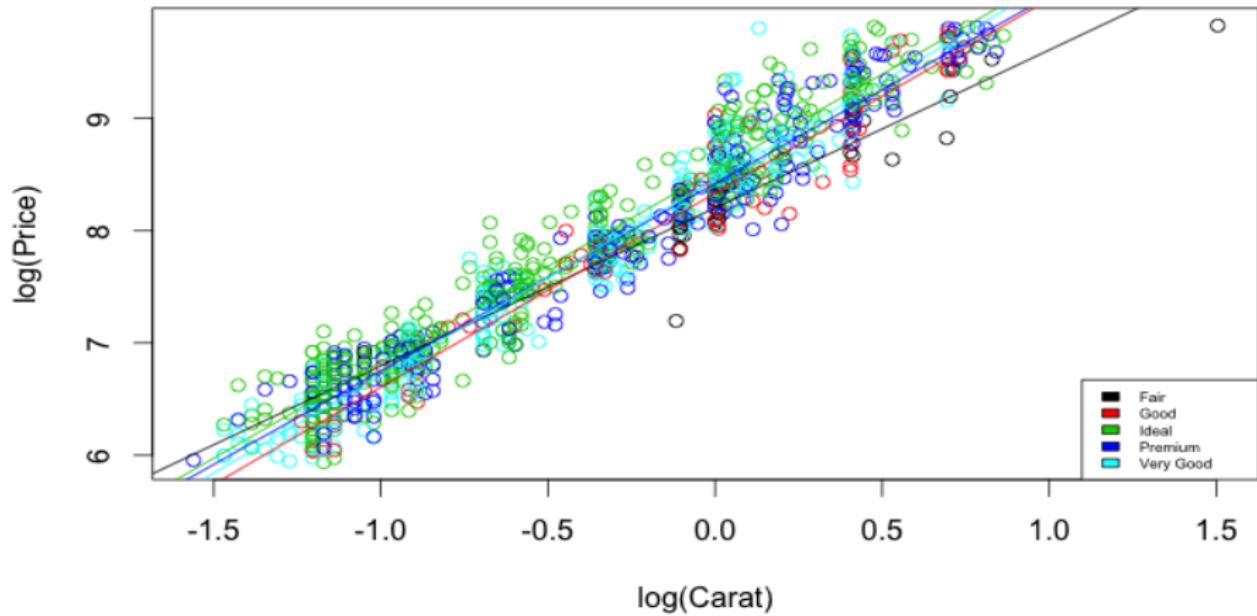

Building a Visualization: An Example


Adding Points to a Scatterplot

- Most easily done with `points(x, y)`.
- (x, y) is the location of the point to be added.
- `example(points)` could be helpful.

Building a Visualization: An Example

We add a new point for a diamond that is \$898 and 0.67 carats.

```
> points(-0.4, 6.8, pch = "*", col = "purple")
```

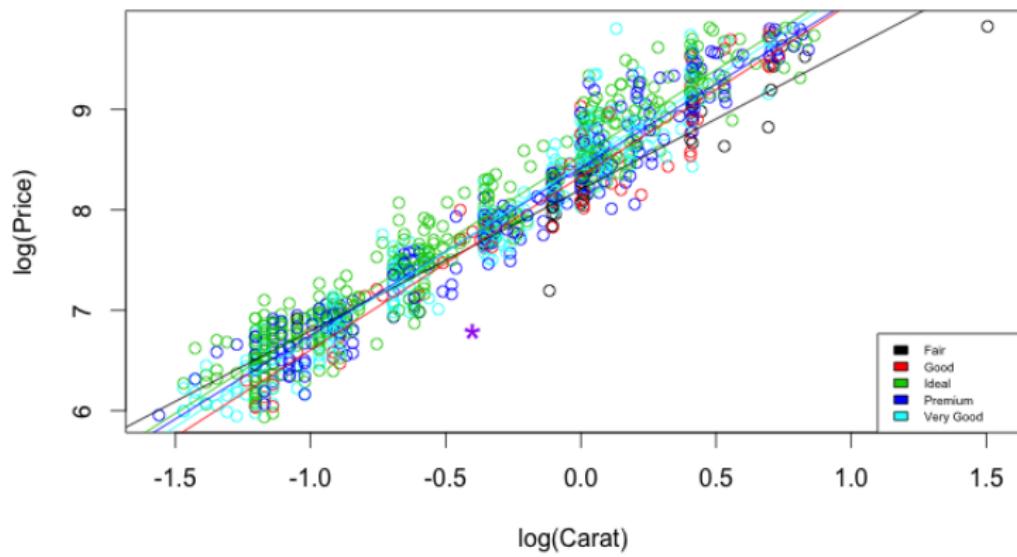

Building a Visualization: An Example


Adding Text to a Scatterplot

- Most easily done with `text(x, y, label)`.
 - `(x, y)` is the location of the text to be added.
 - `label` is the text to be added at the specified location.
- The `locator()` function we saw in Lecture 1 can be useful here.

Building a Visualization: An Example

We add text to the new point we just added.

```
> text(-0.4, 6.8 - .2, "New Diamond", cex = .5)
```

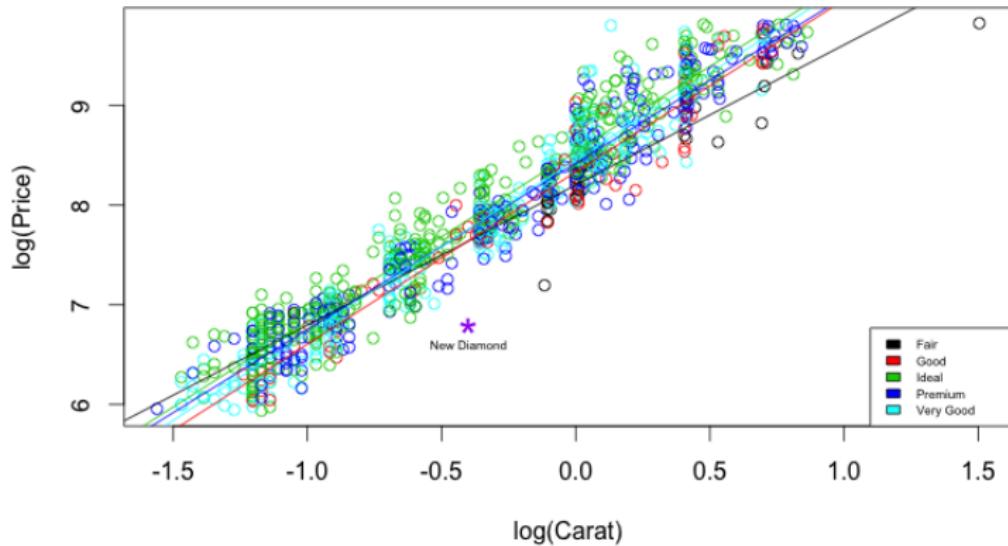

Useful Graphical Parameters

The table below lists a selection of R's graphical parameters. More info at <http://www.statmethods.net/advgraphs/parameters.html> or using `?par`.

Parameter	Description
<code>pch</code>	<i>Point Character</i> . Character of the points in the plot.
<code>main</code>	Title of the plot.
<code>xlab, ylab</code>	Axes labels.
<code>lty</code>	<i>Line Type</i> . E.g. 'dashed', 'dotted', etc.
<code>lwd</code>	<i>Line Width</i> . Line width relative to default = 1.
<code>cex</code>	<i>Character Expand</i> . Character size relative to default = 1.
<code>xlim, ylim</code>	The limits of the axes.
<code>mfrow</code>	Plot figures in an array (e.g. next to each other).
<code>col</code>	Plotting color.